


MAI[®] 400EASY PLUS

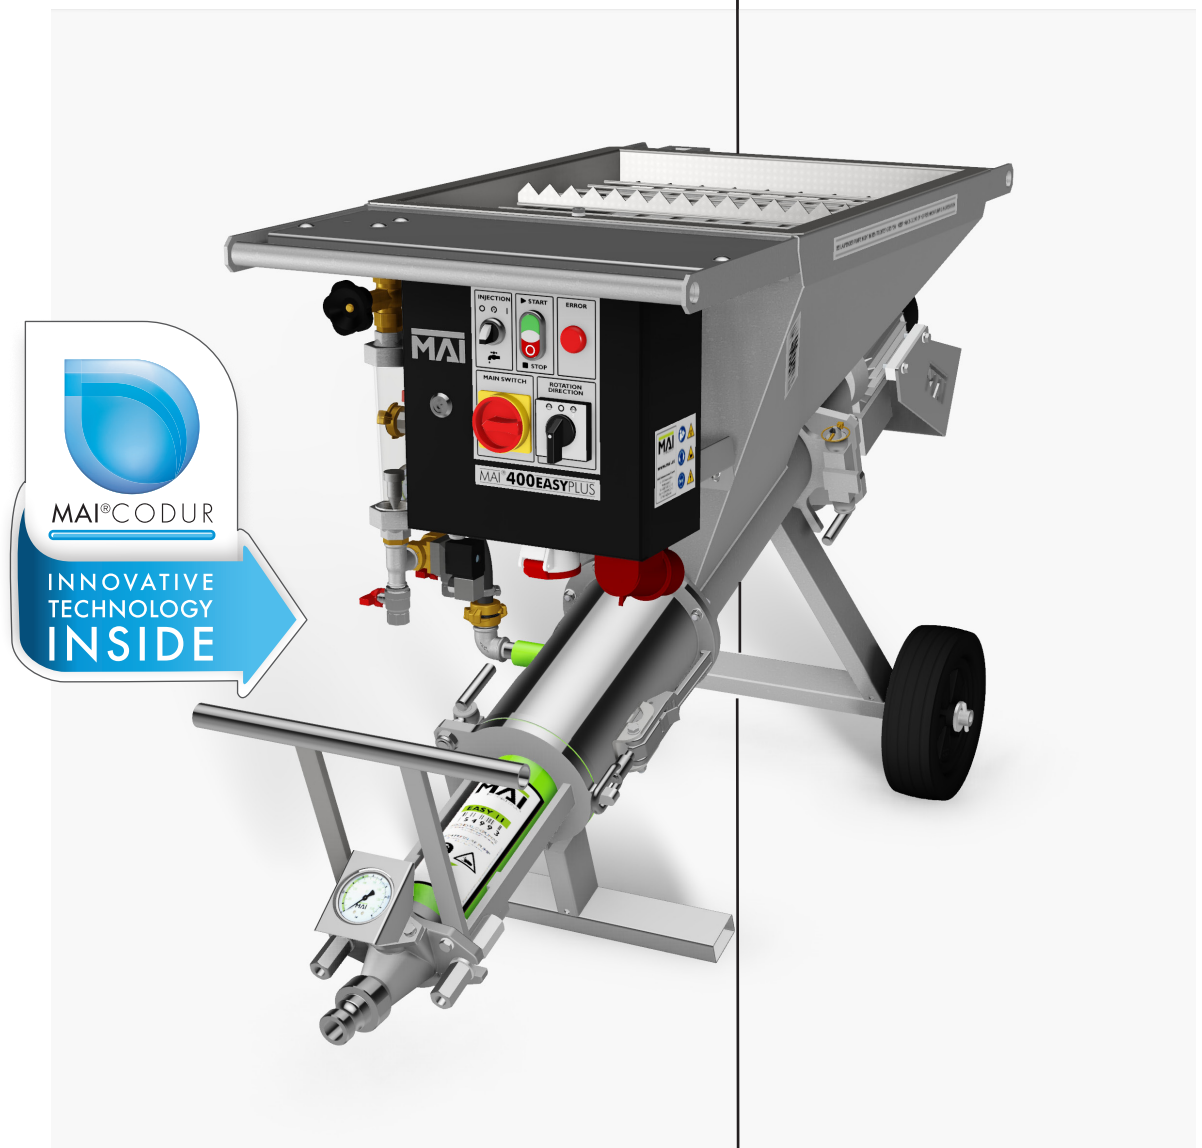

THE INDIVIDUAL IS OUR MAIN CONCERN

EXCELLENT AND INEXPENSIVE

MAI[®]400EASY PLUS

APPLICATIONS

The MAI[®]400 EASY PLUS is a proven high-quality machine which is used successfully around the world in tunnel construction, civil engineering, mining and shoring of building excavations, slopes and hill sides.

AREAS OF USE

The proven mixing and pumping technology is especially suitable for:

- Injection work
- Re-injection grouting
- Drill hole filling
 - Back filling
- Anchor mortar

FEATURES

The MAI[®]400 EASY PLUS impresses in particular with its extremely low energy requirements. The new MAI[®]CODUR mixing zone lining extends the service life of the whole machine.

The hot dip galvanized frame guarantees optimum corrosion protection and can withstand even the toughest treatment. Thanks to the user-friendly and modular design, the MAI[®]400 EASY PLUS is simply to dismantle and therefore quick to clean and maintain.

SCOPE OF DELIVERY

- Spur gear motor 4,0 kW / 290 rpm
 - Worm pump EASY 11
 - Cleaning equipment
 - Tools

TECHNICAL DATA

Operating voltage:	200-240V/1/PE/50-60Hz
	or
	400V/3/PE/50Hz
Nominal power:	4,0 kW
Fusing:	16A at 400V/3
	32A at 200-240V/1
Delivery rate:	16 l/min
L x W x H:	152 x 58 x 90 cm
Filling height:	105 cm

WEIGHTS

Transport weight basic unit:	55 kg
Pump unit:	27 kg
Conveying mixing unit:	9 kg
Safety screen with bag opener:	5 kg
Driving unit with mixing tool:	41 kg
Total weight:	136 kg



MAI[®] International GmbH, Werkstraße 17, 9710 Feistritz/Drau
Austria, Europe, E-mail: mai@mai.at, Internet: www.mai.at
Tel. +43 (0) 4245/6233-0, Fax +43 (0) 4245/6233-10

MAI[®] and MAI-PUMP[®] are registered trademarks of MAI[®] International GmbH.
MAI[®] International GmbH reserves the right to alter its machine specifications and descriptions
at any time without prior notice. © MAI[®] International GmbH, 2016, EN03

MAI
INTERNATIONAL[®]