



**Contents**

Inhaltsverzeichnis / Sommaire / Indice

**Page**

Seite / Page / Página

6° .....	93
12° .....	94-95
Reaming Bits .....	96

REAMING TOOLS


## Reaming tools


Erweiterungsbohrausrüstung / Equipement pour alésage / Varillaje de ensanchadoras


---

6°

Taper / Konus  
Cône / Cono

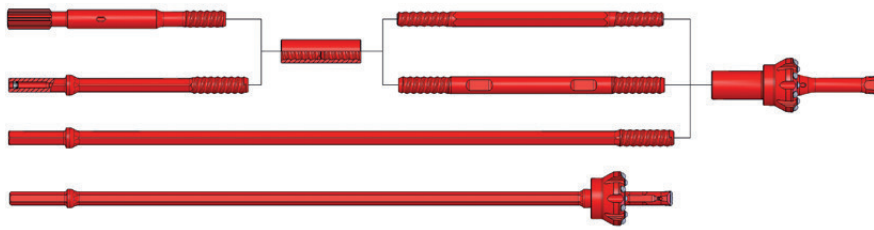


Reaming bit Erweiterungsbohrkrone Taillant aléiseur Broca ensanchadora	Carbide dimension Hartmetallabmessung Dimension métal dur Dimension metal duro				D		Part No. Artikel Nr. N° de réf. Cat. N°
	Gauge / Umfang diamètre / diámetro		Front / Stirnseite front / frente		[mm]	[in]	
	[No.]	[mm]	[No.]	[mm]			
	8	9.5	4	8	64	2 1/2"	43030
	6	11	3	11	76	3"	43031
	8	12.7	4	11	89	3 1/2"	43014

Pilot adapter Führungsstück Adaptateur pilote Adaptador piloto	Thread / Gewinde Filet / Rosca	L		D		Flushing hole Spüllöcher		Part No. Artikel Nr. N° de réf. Cat. N°
		[mm]	[in]	[mm]	[in]	Front / Side	Front / Side	
	R 25	300	11 13/16"	28	1 3/32"	1	1	43089
	R 28	300	11 13/16"	28	1 3/32"	1	1	43085
	R 32	300	11 13/16"	28	1 3/32"	1	1	43083

Thread Gewinde Filet Rosca	Carbide dimension Hartmetallabmessung Dimension métal dur Dimension metal duro				L		D		Flushing hole Spüllöcher		Part No. Artikel Nr. N° de réf. Cat. N°	
	Gauge / Umfang diamètre / diámetro		Front / Stirnseite front / frente		[mm]	[in]	[mm]	[in]	Front / Side	Front / Side		
	[No.]	[mm]	[No.]	[mm]								
	R 25	4	6.3	1	6.3	267	10 1/2"	26	1 1/32"	1	1	43070
	R 28	4	6.3	1	6.3	267	10 1/2"	26	1 1/32"	1	1	43071
	R 32	4	6.3	1	6.3	267	10 1/2"	26	1 1/32"	1	1	43072




Pilot rod Pilotstange Allonge pilote Barra piloto	L		D		Part No. Artikel Nr. N° de réf. Cat. N°
	[mm]	[in]	[mm]	[in]	
 Shank H 22 x 108 mm (7/8" x 4 1/4")	400	1' 4"	27	1 1/16"	47284
	800	2' 7"	27	1 1/16"	47205
	1200	3' 11"	27	1 1/16"	43703
	1600	5' 3"	27	1 1/16"	47105
	1800	5' 11"	27	1 1/16"	47225
	2000	6' 7"	27	1 1/16"	47169
	2400	7' 10"	27	1 1/16"	47116
	3000	9' 10"	27	1 1/16"	47227
	3300	10' 10"	27	1 1/16"	47106


REAMING TOOLS



## Reaming tools

Erweiterungsbohrausrüstung / Equipement pour alésage / Varillaje de ensanchadoras

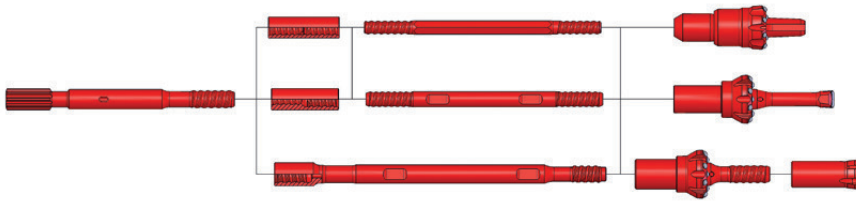**12°**  
Taper / Konus  
Cône / Cono

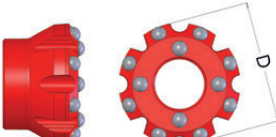


Reaming bit Erweiterungsbohrkrone Taillant aléiseur Broca ensanchadora	Carbide dimension Hartmetallabmessung Dimension métal dur Dimension metal duro				D		Part No. Artikel Nr. N° de réf. Cat. N°
	Gauge / Umfang diamètre / diámetro		Front / Stirnseite front / frente		[mm]	[in]	
	[No.]	[mm]	[No.]	[mm]			
	8	9.5	4	8	76	3"	43010
	8	12.7	4	9.5	89	3 1/2"	43011
	8	12.7	4	12.7	102	4"	43012
	8	14	4	14	115	4 1/2"	43017
	8	14	8	12.7	127	5"	43013

Pilot adapter Führungsstück Adaptateur pilote Adaptador piloto	Thread / Gewinde Filet / Rosca	L		D		Flushing hole Spüllöcher		Part No. Artikel Nr. N° de réf. Cat. N°
		[mm]	[in]	[mm]	[in]	Front / Side		
	R 32	255	10 1/32"	40	1 9/16"	1	1	43082
	R 35	255	10 1/32"	40	1 9/16"	1	1	43099
	T 38	265	10 13/32"	40	1 9/16"	1	1	43092
	R 32 / R 32	242	9 1/2"					43084
	R 35 / R 35	242	9 1/2"					43093
	T 38 / R 32	260	10 7/32"					43097


Thread Gewinde Filet Rosca	Carbide dimension Hartmetallabmessung Dimension métal dur Dimension metal duro				L		D		Flushing hole Spüllöcher		Part No. Artikel Nr. N° de réf. Cat. N°
	Gauge / Umfang diamètre / diámetro		Front / Stirnseite front / frente		[mm]	[in]	[mm]	[in]	Front / Side		
	[No.]	[mm]	[No.]	[mm]							
R 32	4	9.5	2	8	240	9 7/16"	41	1 5/8"	1	1	43073
T 38	4	9.5	2	8	240	9 7/16"	41	1 5/8"	1	1	43074




Bit Bohrkrone Taillant Broca	Thread Gewinde Filet Rosca	Part No. Artikel Nr. N° de réf. Cat. N°
	R 32	See page / Siehe Seiten voir page / ver página 81, 82, 86
	R 35	

12°


Taper / Konus  
Cône / Cono

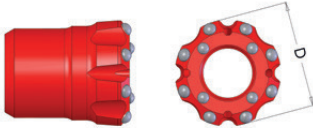(Locking thread T12)	Carbide dimension Hartmetallabmessung Dimension métal dur Dimension metal duro				D		Flushing hole Spüllöcher		Part No. Artikel Nr. N° de réf. Cat. N°
	Gauge / Umfang diamètre / diámetro		Front / Stirnseite front / frente		[mm]	[in]	Front / Side		
	[No.]	[mm]	[No.]	[mm]					
	8	12.7	4	11	102	4"	4	0	43000
	8	12.7	4	11	115	4 1/2"	4	0	43002
	8	12.7	4	11	127	5"	4	0	43001

(Locking thread T12)	Thread / Gewinde Filet / Rosca	L		D		Part No. Artikel Nr. N° de réf. Cat. N°
		[mm]	[in]	[mm]	[in]	
	R 32	304	12"	47	1 7/8"	43075
	R 38	304	12"	47	1 7/8"	43076
	T 38	304	12"	47	1 7/8"	43078
	T 45	304	12"	47	1 7/8"	43079

## Reaming tools

Erweiterungsbohrersüstung / Equipement pour alésage / Varillaje de ensanchadoras

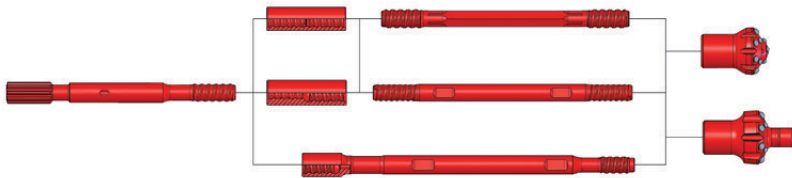

## Reaming Bits

Erweiterungsbohrkrone  
Taillant aléseur / Broca ensanchadora

Reaming bit Erweiterungsbohrkrone Taillant aléseur Broca ensanchadora	Thread / Gewinde Filet / Rosca	Carbide dimension Hartmetallabmessung Dimension métal dur Dimension metal duro				D		d		Flushing hole Spüllöcher		Part No. Artikel Nr. N° de réf. Cat. N°	
		Gauge / Umfang diamètre / diámetro		Front / Stirnseite front / frente		[mm]	[in]	[mm]	[in]	Front / Side			
		[No.]	[mm]	[No.]	[mm]								
	R 32	8	14	4 / 3	11 / 11	102	4"	41	1 5/8"	2	0	43067	
	T 38	8	14	7 / 4 / 2	11 / 11 / 9.5	102	4"	51	2"	2	0	43043	
	T 38	8	14	4 / 6	12.7 / 12.7	127	5"	67	2 5/8"	2	0	43044	
	T 45	8	14	4 / 6	12.7 / 12.7	127	5"	64	2 1/2"	2	0	43059	
	T 45	8	14	4 / 6	12.7 / 12.7	127	5"	73	2 7/8"	2	0	43045	
	T 38	8	16	6 / 6	14 / 14	152	6"	102	4"	2	0	43046	
	T 45	8	16	2 / 4 / 6	14 / 16 / 12.7	152	6"	64	2 1/2"	2	0	43060	
	ST 58	8	16	4 / 6	14 / 14	152	6"	89	3 1/2"	2	0	43047	
	R 38	10	16	6 / 3	14 / 14	178	7"	76	3"	2	0	43048	
	T 38	10	16	8 / 16	16 / 14	203	8"	152	6"	2	0	43049	
	ST 58	12	14	20 / 4	14 / 14	225	8 7/8"	127	5"	4	0	43061	
		R 32	8	11	7	9.5	76	3"	29	1 5/32"	3	1	43040
		R 32	8	12.7	6 / 1	11 / 9.5	89	3 1/2"	29	1 5/32"	3	2	43041
		R 32	8	12.7	6 / 1	12.7 / 9.5	102	4"	29	1 5/32"	3	2	43042
		R 35	8	12.7	6 / 1	12.7 / 9.5	102	4"	29	1 5/32"	3	2	43052
T 38		8	12.7	6 / 1	12.7 / 9.5	102	4"	29	1 5/32"	3	2	43064	
R 32		8	14	10 / 1	12.7 / 11	115	4 1/2"	29	1 5/32"	4	1	43050	
T 38		8	14	10 / 1	12.7 / 11	115	4 1/2"	29	1 5/32"	4	1	43065	
R 32		8	14	10 / 1	12.7 / 11	127	5"	29	1 5/32"	4	1	43051	
T 38		8	14	10 / 1	12.7 / 11	127	5"	29	1 5/32"	4	1	43066	

Note: other sizes available upon request